



UKAL

UKAL

BEAUMONT FENCING SELECTION



- 5 **HOBBY Range**
- 6 **CLASSIC Range**
- 8 **PADDOCK Range**
- 10 **Permanent fencing**
- 11 **Connections**
- 12 **Insulators**
- 14 **Handle**
- 15 **Fence posts**
- 16 **Accessories & testers**
- 17 **Reels**
- 18 **Fencing kits**
- 19 **Nets**
- 22 **Practical guide**

UKAL.com

CHOOSING THE RIGHT FENCING

Why use an electric fence?

- To keep your animals safe and protect them from intruders and threats from wild animals.
- To keep your animals in an enclosed space.
- To protect plots of land that you do not want your animals to stray onto.
- To set up mobile fencing to enable your animals to graze on fresh grass.

How does electric fencing for strip grazing work?

An ready-to-use electric fence for strip grazing is an open electrical circuit. The fence energizer generates a very shortlived electric pulse. This pulse lasts a matter of milliseconds. The electric fence for grazing is therefore not dangerous for humans in normal usage conditions. The fence wire and the earth are the electrical conductors.

During operation, no electric current passes through the electric fence.

The electric current only passes when the electrical circuit is closed.

This happens when an animal touches the fence wire. The electrical circuit is closed when the electric pulse passes through the animal and returns to the energizer via the earth. This generates a shock, which guarantees that the fence acts as a deterrent.

When is the electrical circuit not closed?

- When the wire is broken.
- When the electrical conductivity of the fence materials is poor and the current cannot pass.
- When the animal's fur is too thick.
- When the fence is covered with too much vegetation. The current flows into the earth.
- Due to incorrect and insufficient earthing of the fence energizer.
- Due to excessively dry conditions, or when the soil is covered by ice which acts as an insulator.

The importance of earthing


This is the most important aspect, and yet it is the one that is most often neglected when setting up an electric fence. Do not forget that an electric fence will not function if it is not properly earthed. It is important to make sure the earth rod is properly buried in the soil in a place with plenty of moisture. The earth rod cable must be correctly screwed into the energizer terminal.

NOTE: You must not use the earth of the building's mains power supply.







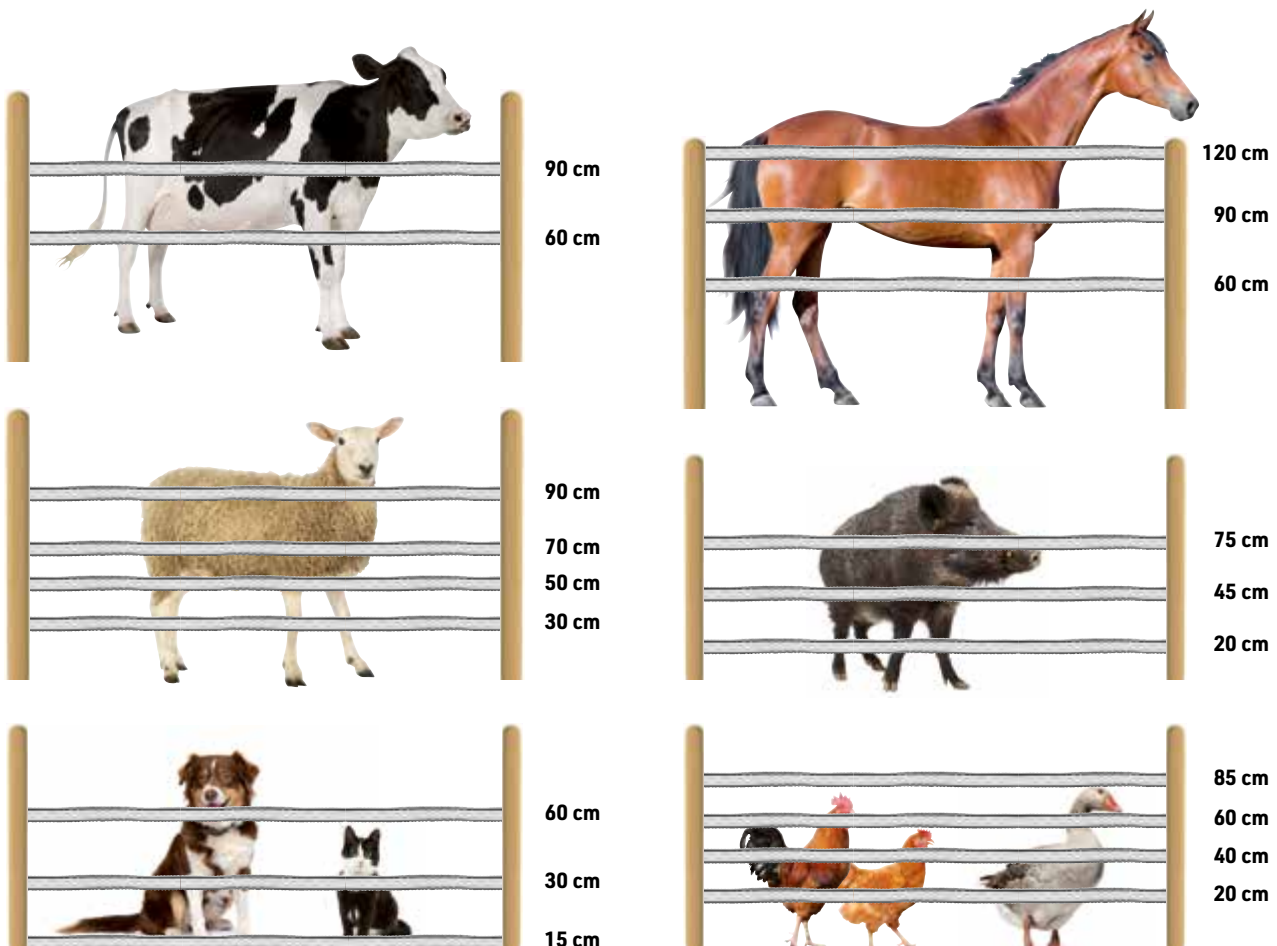
























































The earth of the mains power supply and the earth of the fence must be at least 10 m apart.

For difficult installations (long fences, very dry soil), maximise efficiency by having multiple earths. If the voltage measured is greater than 300 V (0.3 kV), then the earthing is insufficient and must be improved using additional earth rods.

FENCE HEIGHT




ENERGIZER COMPARISON

Product reference	Product name	Power supply	Stored energy	Output energy	Distance in the laboratory CEE	Number of nets							
CLASSIC													
125920050	P180		0,18 J	0,12 J	4 km	NA							
125921020 125921020SP	RB880	 	1,25 J / 12 V 0,7 J / 9 V	0,98 J / 12 V 0,5 J / 9 V	20 km	5 x 50 m							
125923005	RB85		0,85 J	0,45 J	8 km	2 x 50 m							
125923023	S170		1,7 J	1,4 J	55 km	8 x 50 m							
125923024	S440		4,4 J	3,0 J	115 km	10 x 50 m							
125923025	S510		5,1 J	3,8 J	130 km	12 x 50 m							
PADDOCK													
125940050	P180		0,18 J	0,12 J	4 km	NA							
125943980	RB880	 	1,25 J / 12 V 0,7 J / 9 V	0,98 J / 12 V 0,5 J / 9 V	20 km	5 x 50 m							
125943045	S510		5,1 J	3,8 J	130 km	12 x 50 m							
125943005	RB85		0,85 J	0,45 J	8 km	2 x 50 m							
HOBBY													
125945005 125945005SP	Hobby P180		0,18 J	0,12 J	4 km	NA							
125945010	Hobby SB230	 	2,3 J	1,13 J	18 km	4 x 50 m							
125945015	Hobby S120		1,2 J	0,9 J	40 km	5 x 50 m							

BEAUMONT QUALITY

Beaumont is a brand with expertise built through years of hands-on experience.



NON-DEFORMABLE



SOLID



WELDED MESH

































**The quality of Beaumont nets is tried and tested.
The performance of the products in the field speaks for itself.**

Contact us for further information on **+33 (0)3 88 07 40 15**

















CONDUCTOR COMPARISON

Product reference	Tape/Wire/Rope	Length	Diameter or width	Number of conductors	Conductor type	Résistance	Breaking load							
-------------------	----------------	--------	-------------------	----------------------	----------------	------------	---------------	---	---	---	---	---	---	---

CLASSIC

125165312	Tape	200 m	12 mm	4 x 0,20 mm / 1 x 0,15 mm	-	5,8 ohms/m	115 kg							
125165320	Tape	200 m	20 mm	6 x 0,20 mm / 1 x 0,15 mm	-	3,9 ohms/m	90 kg							
125165340	Tape	200 m	40 mm	8 x 0,20 mm / 1 x 0,15 mm	-	2,90 ohms/m	280 kg							
125165112	Wire	200 m	-	6 x 0,15 mm	Inox	7,20 ohms/m	45 kg							
125165114	Wire	400 m	-	6 x 0,15 mm	Inox	7,20 ohms/m	45 kg							
125165216	Rope	200 m	Ø 6 mm	8 x 0,20 mm	Inox	2,9 ohms/m	450 kg							
125165186	Wire	200 m	-	Conductor stainless steel 3 x 0,15 mm + 1 x 0,20 mm	-	0,53 ohms/m	48 kg							
125165188	Wire	400 m	-	cuiivre Conductor stainless steel 4 x 0,15 mm + 1 x 0,20 mm	-	0,53 ohms/m	48 kg							
125176215	Braided rope	200 m	Ø 5 mm	copper Conductor stainless steel 4 x 0,15 mm + 1 x 0,20 mm	-	0,18 ohms/m	400 kg							

PADDOCK

125167120	Tape	200 m	20 mm	6 x 0,15 mm	Inox	7,2 ohms/m	90 kg							
125167140	Tape	200 m	40 mm	10 x 0,15 mm	Inox	4,32 ohms/m	180 kg							
125167005	Rope	200 m	Ø 5 mm	6 x 0,15 mm	Inox	7,20 ohms/m	120 kg							
125167312	Tape	200 m	12 mm	4 x 0,20 mm + 1 x 0,15 mm	Inox	5,8 ohms/m	115 kg							
125167320	Tape	200 m	20 mm	6 x 0,20 mm + 1 x 0,15 mm	Inox	3,9 ohms/m	140 kg							
125167340	Tape	200 m	40 mm	8 x 0,20 mm + 1 x 0,15 mm	Inox	2,9 ohms/m	280 kg							
125167216	Rope	200 m	Ø 6 mm	8 x 0,20 mm	Inox	2,9 ohms/m	140 kg							

HOBBY

125165410	Tape	200 m	10 mm	3 x 0,15 mm	Inox	14,4 ohm/m	39 kg							
125165450	Wire	300 m	-	3 x 0,15 mm	Inox	14,4 ohm/m	54 kg							



The energizers and conductors for different animal species are given as a guide only.

HOBBY S120 MAINS ENERGIZER



A 230V energizer that performs well with small and medium-sized fences with moderate vegetation. This energizer is the ideal solution for hobby farming and for keeping in small animals, hens, dogs and cats. Anti-UV treatment. 2-year warranty.

Sku. 125945015



230 V



HOBBY P180 BATTERY-POWERED ENERGIZER



9V battery model for mobile fences and short distances with no vegetation. This energizer is the ideal solution for hobby farming and for keeping in small animals, dogs and cats. Anti-UV treatment. 2-year warranty.

Sku. 125945005SP



9 V - 12 V



HOBBY SB230 ENERGIZER



This energizer has 2 possible power supplies (battery or mains). This energizer is the ideal solution for hobby farming, for sheep grazing, and for keeping in small animals, hens, dogs and cats. Comes with battery connection cable and transformer for 230 V power supply. Anti-UV treatment. 2-year warranty.

Sku. 125945010

12 V / 230 V



Caractéristiques techniques	Sku. 125945005SP	Sku. 125945010	Sku. 125945015
Power supply	9 V / 12 V	12 V / 230 V	230 V
Stored energy	0,18 J	2,3 J	1,2 J
Output energy	0,12 J	1,13 J	0,9 J
Voltage	8 500 V	8 000 V	7 800 V
Voltage at 500 Ohms	1 500 V	3 800 V	3 600 V
Power consumption	15 mA / 12 V - 22 mA / 9 V	150 mA	2 W
Indicator light	Yes	Yes	Yes
Distance in the laboratory CEE	4 km	18 km	40 km
Distance with little or no vegetation	2,8 km	11 km	8 km
Distance with moderate vegetation	0,9 km	4,5 km	3,5 km
Distance with dense vegetation	0,2 km	1,3 km	1,2 km
Number of nets	NA	4 x 50 m	5 x 50 m

HOBBY GREEN AND WHITE TAPES



Perfect for optimum current carrying with no loss of energy, the conductors provide excellent fencing for your livestock! UV resistant.

Sku. 125165410



10 mm / 200 m



HOBBY WHITE AND GREEN WIRES



Perfect for optimum current carrying with no loss of energy, the conductors provide excellent fencing for your livestock! UV resistant.

Sku. 125165450



Ø 0,15 mm / 300 m



Technical characteristics	Sku. 125165410	Sku. 125165450
Width x length	10 mm x 200 m	Ø 0,15 mm / 300 m
Number	3*0,15 mm	3*0,15 mm
Resistance	14,4 ohm/m	14,4 Ohm/m
Breaking load	39 kg	54 kg

FENCING BEAUMONT | CLASSIC Range



CLASSIC P180 BATTERY- POWERED ENERGIZER



Practical, easy-to-use battery-powered energizer. Easily transportable, with a long battery life due to its low energy consumption. For fences up to 4 km long without vegetation. Indicator light. 2,5 W solar charger included to increase running time. 2 years warranty.

Sku. 125920050



9V - 12V - Solar panel 2,5 W



CLASSIC RB880 3-IN-1 ENERGIZER



Ideal for long fences. Multifunction energizer. Works on a battery, 9 V batteries, or the mains power supply. 10 W solar panel included. To plug the energizer into the mains, you will need to add a transformer (not included). Handle for easy transport. Battery level indicator. 3 display levels. Multi-purpose, convenient and easy to use. Our recommendation if you are looking for an energizer suitable for all terrains! 2 years warranty.

Sku. 125921020



9V - 12V - 230 V - Solar panel 10 W



Sku. 125921020SP



9V - 12V - 230 V - Energizer only



CLASSIC RB85 MAINS ENERGIZER



This compact, modern energizer is ideal for pet owners. Suitable for medium-length fences: permanent fencing for cattle/sheep/ goats / dog fencing / protective fencing for crops, ponds and gardens. 2 years warranty.

Sku. 125923005



230 V



CLASSIC S170 MAINS ENERGIZER



Shock-resistant ABS housing. Indicator lights. Designed for medium-sized fences. Ideal for medium-sized fences for sensitive species (dogs, horses, etc.). 2 years warranty.

Sku. 125923023



230 V



All our energizers come with a 2-year warranty and a warning sign.

Technical characteristics	Sku. 125920050	Sku. 125921020	Sku. 125923005	Sku. 125923023	Sku. 125923024	Sku. 125923025
Power supply	9 V / 12 V	9 V / 12 V / 230 V	230 V	230 V	230 V	230 V
Stored energy	0,18 J	1,25 J / 12 V - 0,7 J / 9 V	0,85 J	1,7 J	4,4 J	5,1 J
Output energy	0,12 J	0,98 J / 12 V - 0,5 J / 9 V	0,45 J	1,4 J	3,0 J	3,8 J
Voltage	8 500 V	10 800 V / 12 V - 7 000 V / 9 V	7 800 V	9 500 V	10 500 V	10 000 V
Voltage at 500 Ohms	1 500 V	3 800 V	3 800 V	5 000 V	5 700 V	5 600 V
Power consumption	2,5 W	10 W	1 W	3 W	5 W	8 W
Indicator light	Yes	3- steps	No	Yes	2 power outputs	6-step LED voltage indicator, 2 power outputs (one high and one low)
Distance in the laboratory CEE	4 km	20 km	8 km	55 km	115 km	130 km
Distance with little or no vegetation	0,9 km	1,1 km	3,5 km	15 km	20 km	35 km
Distance with moderate vegetation	2 km	2 km	2 km	4,5 km	7 km	13 km
Distance with dense vegetation	0,8 km	1,7 km	0,8 km	1,7 km	2 km	6 km
Number of nets	2 x 50 m	8 x 50 m	2 x 50 m	8 x 50 m	10 x 50 m	12 x 50 m

CLASSIC Range | FENCING BEAUMONT

CLASSIC S440 MAINS ENERGIZER



Shock-resistant ABS housing. Energizer equipped with an operation indicator light and 2 power outputs. Suitable for all animal species. For large and mid-sized fences. 2 years warranty.

Sku. 125923024



230 V



CLASSIC S510 MAINS ENERGIZER



2 power outputs (one high and one low) to adapt the power level to your needs or electrify two separate fences. Powerful energizer for fences up to 35 km long without vegetation and 6 km with very dense vegetation. 6-step LED voltage indicator. Can be used to electrify up to 12 nets. Easy to use. Energizer recommended for long and very long fences in difficult conditions (dense vegetation, animals that are difficult to contain). 2 years warranty.

Sku. 125923025



230 V



GREEN AND WHITE TAPES



Sku. 125165312



12 mm / 200 m



Sku. 125165320



20 mm / 200 m



Sku. 125165340



40 mm / 200 m



GREEN AND WHITE ROPE



Sku. 125165216



Ø 6 mm / 200 m



TWISTED GREEN AND WHITE WIRES



Sku. 125165112



200 m



Sku. 125165114



400 m



BRAIDED WIRES AND ROPES



Sku. 125165188



Braided wires 400 m
Limited stock



Technical characteristics	Sku. 125165312	Sku. 125165320	Sku. 125165340	Sku. 125165216	Sku. 125165112	Sku. 125165114	Sku. 125165188
Width x length	12 mm x 200 m	20 mm x 200 m	40 mm x 200 m	Ø 6 mm x 200 m	200 m	400 m	400 m
Number	4 x 0,20 mm / 1 x 0,15 mm	6 x 0,20 mm / 1 x 0,15 mm	8 x 0,20 mm / 1 x 0,15 mm	Stainless steel conductor 8 x 0,20 mm	Stainless steel conductor 6 x 0,15 mm	Stainless steel conductor 6 x 0,15 mm	Stainless steel conductor 3 x 0,15 mm + 1 x 0,20 mm copper
Resistance	5,8 ohms/m	3,9 ohms/m	2,9 ohms/m	2,9 ohms/m	7,20 ohms/m	7,20 ohms/m	0,53 ohms/m
Breaking load	115 kg	90 kg	280 kg	450 kg	45 kg	45 kg	48 kg

FENCING BEAUMONT | Paddock Range



Paddock P180
BATTERY-POWERED ENERGIZER

Practical, easy-to-use battery-powered energizer. For fences up to 4 km long without vegetation. Indicator light. 2,5 W solar charger included to increase running time. 2 years warranty.

Sku. 125940050
9V - 12V - Solar panel 2,5 W



Paddock RB880 3-IN-1
ENERGIZER

Ideal for long fences. Multifunction energizer. Works on a battery, batteries, or the mains power supply. 10 W solar panel included. To plug the energizer into the mains, you will need to add a transformer (not included). Handle for easy transport. Battery level indicator. 3 display levels. Multi-purpose, convenient and easy to use. 2 years warranty.

Sku. 125943980
9V - 12V - 230 V - Solar panel 10 W



Paddock S510
MAINS ENERGIZER

Energizer equipped with 2 outputs (maximum and reduced) to adapt the power level to your needs or to electrify two independent fences. Powerful energizer for fences up to 30 km long without vegetation and 6 km with very dense vegetation. 6-step LED voltage indicator. 2 power outputs (one high and one low). Easy to use. Energizer recommended for long and very long fences in difficult conditions (dense vegetation, animals that are difficult to contain). 2 years warranty.

Sku. 125943045
230 V



Paddock RB85
MAINS ENERGIZER

This compact, modern energizer is ideal for horse owners. Suitable for medium-length fences. 2 years warranty.

Sku. 125943005
230 V



All our energizers come with a 2-year warranty and a warning sign.

Technical characteristics	Sku. 125940050	Sku. 125943980	Sku. 125943045	Sku. 125943005
Power supply	9 V / 12 V	9 V / 12 V / 230 V	230 V	230 V
Stored energy	0.18 J	1,25 J / 12 V - 0,7 J / 9 V	5.1 J	0,85 J
Stored energy	0.12 J	0,98 J / 12 V - 0,5 J / 9 V	3.8 J	0,45 J
Voltage	8 500 V	10 800 V / 12 V - 7 000 V / 9 V	10 000 V	7 800 V
Voltage at 500 Ohms	1 500 V	4 500 V / 12 V - 3 000 V / 9 V	5 600 V	3 800 V
Power consumption	15 mA / 12 V - 22 mA / 9 V	90 mA / 12 V - 70 mA / 9 V	8 W	1 W
Indicator light	Yes	3 display levels	6-step LED voltage indicator. 2 power outputs (one high and one low)	No
Distance in the laboratory CEE	4 km	20 km	130 km	8 km
Distance with little or no vegetation	2,8 km	9,5 km	35 km	3,5 km
Distance with moderate vegetation	0,9 km	3,3 km	13 km	2 km
Distance with dense vegetation	0,2 km	1,1 km	6 km	0,8 km
Number of nets	NA	5 x 50 m	12 x 50 m	2 x 50 m

BROWN TAPES

These tapes have an anti-UV treatment.

Sku. 125167120



20 mm / 200 m



Sku. 125167140



40 mm / 200 m



GREEN AND WHITE TAPES



These tapes have an anti-UV treatment.

Sku. 125167320



20 mm / 200 m



Sku. 125167340



40 mm / 200 m



BROWN ROPE



These rope have an anti-UV treatment.

Sku. 125167005



Ø 5 mm / 200 m



GREEN AND WHITE ROPE



These rope have an anti-UV treatment.

Sku. 125167216



Ø 6 mm / 200 m



Technical characteristics	Sku. 125167120	Sku. 125167140	Sku. 125167005	Sku. 125167320	Sku. 125167340	Sku. 125167216
Length	20 mm x 200 m	40 mm x 200 m	Ø 5 mm x 200 m	20 mm x 200 m	40 mm x 200 m	Ø 6 mm x 200 m
Number of stainless steel conductors	6 x 0,15 mm	10 x 0,15 mm	6 x 0,15 mm	6 x 0,20 mm + 1 x 0,15 mm	8 x 0,20 mm + 1 x 0,15 mm	8 x 0,20 mm
Resistance	7,2 ohms/m	4,32 ohms/m	7,20 ohms/m	3,9 ohms/m	2,9 ohms/m	2,9 ohms/m
Breaking load	90 kg	180 kg	120 kg	140 kg	280 kg	140 kg

NEED EQUIPMENT FOR YOUR STABLE?

→ See our offer page 103 of the catalogue



FENCING BEAUMONT | Connections and strainers



— **GALVANISED STEEL CABLE** 
Clôture électrique - Elektrozaun - Electric fencing

Breaking load 200 kg. Good conductivity.

Sku. 125140001 

250 m 

Sku. 125140002 

500 m 



— **ZINC-COATED STEEL CABLE** 
Clôture électrique - Elektrozaun - Electric fencing

Zinc-coated steel cable with aluminium powder. Excellent conductor. Breaking load 200 kg. Resistance: 0,12 ohms/m.

Sku. 125141 

500 m 



— **ALUMINIUM CABLE** 
Clôture électrique - Elektrozaun - Electric fencing

Breaking load 200 kg. Good conductivity.

Sku. 125145020 

Ø 2 mm / 400 m 

Lead-out cable



— **SOFT LEAD-OUT CABLE** 
Clôture électrique - Elektrozaun - Electric fencing

Soft lead-out cable.

Sku. 125450030 

30 m 

Sku. 125450 

50 m 



PERMANENT ELECTRIC FENCE
Choose the optimum solution for your pets !

→ Discover our range in the dedicated brochure



Connections

CONNECTION FOR ROPES



Connection for wire and rope. Guarantees high-quality connections.

Sku. 125139015 3 338020 042999

Stainless steel - By 5

Sku. 125139016 3 338020 085651

Aluminium - By 5



CONNECTION FOR TAPE



Easy to use. Suitable for all standard electric fence tapes. Galvanised metal support. Robust tape connector through the metal support of a part, supported by unbreakable plastic.

Sku. 125139220 3 700393 916458

20 mm - By 10
Limited stock



CONNECTION FOR TAPE



Sku. 125139006 3 388770 020051

20 mm - Aluminium - By 5

Sku. 125139046 3 388770 040059

40 mm - Aluminium - By 5

Sku. 125139120 3 338020 077083

20 mm - Steel - By 5
Limited stock

Sku. 125139140 3 338020 077090

40 mm - Steel - By 5
Limited stock



WIRE STRAINER WITH SPRING



Made of stainless steel.

Sku. 125139020 3 338020 061976

By unit



TAPE STRAINER



Made of aluminium.

Sku. 125139010 3 338020 037995

By unit



Connections cables

TAPE/WIRE CONNECTION CABLE



Sku. 125191 3 338020 042241

By 2



CONNECTOR TAPE AND ROPE



Professional cable for connecting ropes (6 mm max). Stainless steel contact plate. Cable length: 60 cm.

Sku. 125192003 3 700393 941757

By unit
Limited stock



Insulators



RING INSULATOR



Duplicate-moulded. Designed for wire, cable and tape conductors, up to 12 mm. Robust body with screw, perfect for screwing into wooden posts.

Sku. 125201 3 338020 026197

Black - By 25

Sku. 125201090 3 338020 085934

Black - By 90

Sku. 125201250 3 338020 063239

Black - By 250



PREMIUM 3-IN-1 INSULATOR



These uniquely shaped insulators are easy to hold in your hand and to screw in even without a tool. The special feature is the construction of the insulator head. The fence material is inserted easily from above, so the fence material will not fall out at a later date. Special insulator for ropes. Recommended for long fences. Short support. Anti-water-droplet system. Self-tapping screw.

Sku. 125226 3 700393 919572

Black - By 20 **Limited stock**



COMBINED WOOD AND STEEL RB INSULATOR



Universal, with captive pin. Fastens to a diameter 10-12 mm steel post at the required height, to a round or flat wooden post with wire, two screws or two nails.

Sku. 125200050 3 388770 040509

Black - By 50



RBL CAPTIVE-PIN INSULATOR



Fastens to a post with only one wire. For wires or cable conductors. Withstands 15 000 V.

Sku. 125266 3 338020 026913

Red - By 50

Sku. 125266100 3 388770 011004

Red - By 100



RBCH INSULATOR



Large model for tapes up to 40 mm, cables and ropes. The screws make it possible to strain the tape properly and install it easily.

Sku. 125223 3 388770 080253

Black - By 25



INSULATOR FOR WIRE & TAPE, 40 MM



Screw-in insulator for wooden posts. Short support. Self-tapping screw. For tapes up to 40 mm wide. For wires and ropes up to 8 mm in diameter. Extremely long, distinct and tapered screw thread. Self-tapping screw for easy tightening. No need for prior drilling or countersinking in the wood. The insulator screw is made of tempered steel.

Sku. 125225 3 700393 918902

Black - By 30



INSULATOR FOR TAPE 12 TO 40 MM AND ROPE



12 to 40 mm tape insulator and for rope up to 8 mm.

Sku. 125207 3 700393 913853

Black - By 25

Sku. 125207090 3 700393 913860

Black - By 90




IGPB KIT WITH 2 FASTENING PLATES AND 2 RBCH INSULATORS



Kit includes: 2 RBCH insulators, 2 aluminium fastening plates for 40 mm tape.

Sku. 125408003 3 388779 760026

Black - By unit



DOUBLE ANCHORING INSULATOR



Essential for installing gates.

Sku. 125281



Black - By 2



64



EGG INSULATOR



Standard quality. Ideal for corners. To be used with wire.

Sku. 125231



Black - By 4



65



STANDOFF RING INSULATOR



Black plastic. Allows to create a distance between the animal and the fence.


Sku. 125230



Black - By 10



16



STANDOFF INSULATOR



Duplicate-moulded over 6 mm diameter.


Sku. 125230001



Black - By 10



16



STRAIGHT STANDOFF RING INSULATOR



Black plastic straight insulator. Allows to create a distance between the animal and the fence.

Sku. 125230002



Black - By 10



24



PIGTAIL INSULATORS



Insulator for metal or fibreglass fence posts.

Sku. 125250



White - Ø 10 mm - By 50



20

Sku. 125251



White - Ø 12 mm - By 50



20

Sku. 125253



White - Ø 50 mm - By 25



30



METAL CORKSCREW INSULATOR



For oval posts.

Sku. 125276



Yellow - By 25



18



RB INSULATOR



Universal insulator for wires and tape. Fastens to diameter 6 - 13 mm posts via a nut system.

Sku. 125200400



Black - By 25



15



CONSULT OUR VOLUME OFFER

Sku. B125409200
(box of 200 handles)




FENCING BEAUMONT | Handles


Handles



EXTRA-LARGE BLACK GATE HANDLE WITH HOOK

Can also be used as a spool for spooling wire and tape up to 20 mm max.


Sku. 125404004  3 700393 942242



Black - By unit
Limited stock 



LARGE BLACK SPRING-TYPE, INSULATING HANDLE

With spring. **Sold by the piece in gencoded bulk.**


Sku. 125404002  3 700393 982866


Black  



SPRING TYPE INSULATING GATE HANDLE

Gate handle with extension internal spring.


Sku. 125405010  3 700393 941931



Black - By 10 






SPRING-TYPE INSULATING GATE HANDLE


Solid, economical handle ideal for for installing a gate in the fence. Integral spring reduces tension and wire breakage. Hook screwed to the front **Sold by the piece in gencoded bulk.**



Sku. 125402102  3 700393 982880

Black  

Sku. 125402003  3 700393 982842

Red  


Sku. 125402010  3 700393 982873



Yellow  



INSULATING GATE HANDLE WITH EXTENSIBLE ELECTRIFIED CORD

Elastic kit with insulating gate handle, recommended for horse enclosures. Can be used to create gateways for farm equipment (opening of up to 8 m).


Sku. 125407  3 338020 086108



Black - By unit  



GATE HANDLE WITH 5 M SPRING

Insulating handle with integrated 5 m spring. Easy to set up for temporary fences. Diameter: 2 cm.

Sku. 125406002  3 338020 085972

Black - By unit  



GATE HANDLE KIT WITH 5 M SPRING

Gate handle : 26 cm. 5 m of spring.

Sku. 125406  3 338020 033416

Handle + spring kit
Black - By unit  


Sku. 125406001  3 338020 052431



Spring only - Black
By unit 




INSULATING HANDLE KIT WITH TAPE FASTENING PLATE

Gate handle with plate by piece. Gate handle: 26 cm. Plate: 15 cm.

Sku. 125408002  3 700393 914072

Black - By unit  

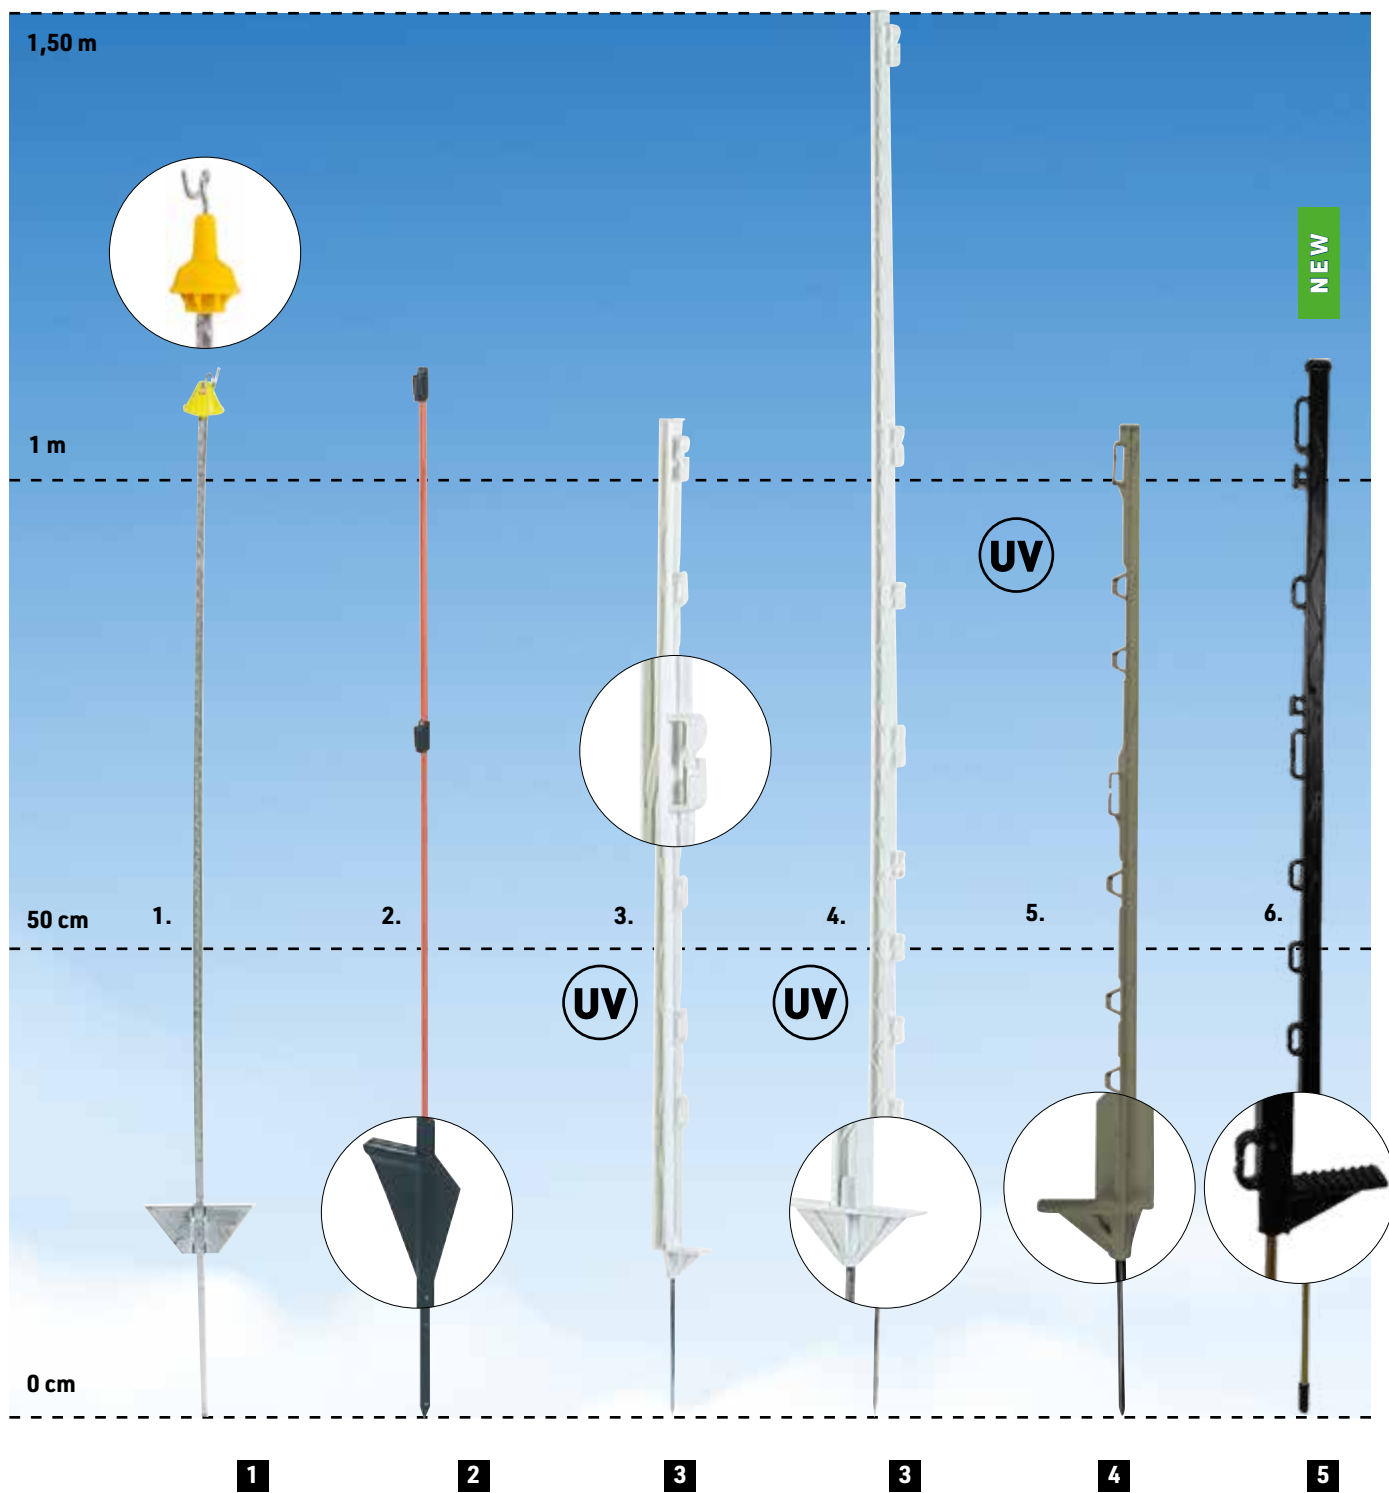

Sku.	125305025	125312050	125331030	125335020	125340107010	125341003
Material	Metal	Fiberglass	Plastic	Plastic	Plastic	100 % recycled plastic
Height*	1,10 m	1,10 m	1,05 m	1,50 m	1,05 m	1,10 m
Number of insulators	1	0	7	8	7	10
Sold in multiples of	25	50	30	20	10	10
Pallet	1 250	1 000	700	700	600	700
Animals						
Gencode						

*Measurement includes full shaft.

FENCING BEAUMONT | Accessories & testers



UNIVERSAL FENCE PLIERS

Multipurpose tool. Insulated handle.

Sku. 125296



By unit



NEW

WARNING SIGNS FOR ELECTRIC FENCING

Must be placed every 50 m on electric fences alongside public roads.

Sku. 125590001



By unit



SET OF CROCODILE CLIPS

For connecting to an energizer or battery.

Sku. 125865



By unit



EARTH ROD WITH WIRE

Earth rod with connecting wire and earth line. Sku. 125891.

Sku. 125891



30 cm - By unit



EARTH ROD

Essential. Essential in order to return the current when an animal comes into contact with the wire.

Sku. 125890



1 m - By unit



LIGHTNING INSULATOR WITH SPRING

Lightning insulator. When the fence is struck by lightning, it directs the voltage surge generated to the earth and keeps the energizer safe. Your energizer warranty will not be applicable if the energizer has been struck by lightning. Lightning conductors are indispensable to protect your fences.

Sku. 125291



By unit



Testers



BEAUMONT 12 KV FENCE TESTER

Indicates the status of your fence via six voltage levels ranging from 2 000 to 12 000 V. Very easy to use.

Sku. 125012



By unit



BEAUMONT DIGITAL FENCE TESTER

This digital voltmeter is the classic measuring instrument. Easy to handle. Rapid testing.

Sku. 125427001



By unit



SELF-INSULATING REEL



With brake and handle. Mounting holes for attaching to a 30 x 30 mm post (large model) or a 20 x 20 mm post (medium model). Attachment hook.

Sk. 125350



Medium model /
1 000 m of wire



BEAUMONT EURO REEL



Plastic reel, spool attached with a pin. Reel can be locked with a hinged locking arm. Metal attachment hook.

Sk. 125343001



500 m of wire



BEAUMONT STANDARD REELS



Sk. 125361001



Large model
800 m of wire
or 300 to 500 m of tape



Sk. 125361002



Medium model
500 m of wire
or 200 to 300 m of tape



LARGE REEL WITH SLING



Pass the sling over your head and the reel will rest on the operator's stomach.

Sk. 125360



Large model / 1 000 m
of wire



CONSULT OUR OFFER

TURBOMAX **horizont**
batteries

Sk. 125H12012,
125H14896,
125H14500...

→ Go to page 262



Fencing kits

FENCING KIT FOR VEGETABLE GARDENS



This fencing kit protects your vegetable garden from pets (dogs, cats) and wild animals (boar, deer, etc.). It is easy to set up and contains all the elements required for an effective fence.

The kit includes:

- 1 HOBBY SB230 dual energizer (mains or battery)
- 1 roll green and white tape (12 mm x 200 m) + 5 connections
- 10 plain plastic fence posts (Height 55 cm)
- 1 earth rod
- 2 "gate kits" (insulators with anchor and handles)
- 8 ring insulators.



Sku. 125710



HOBBY SB230 Energizer

FENCING KIT FOR LARGE DOGS



This fencing kit can be used to create a fenced enclosure for large dogs. It is easy to set up and contains all the elements required for an effective fence.

The kit includes:

- 1 RB85 mains-powered fence energizer
- 1 roll green and white tape (12 mm x 200 m) + 5 connections
- 10 plastic fence posts (90 cm)
- 1 earth rod
- 1 "Electric fencing" warning sign
- 10 m lead-out cable
- 5 insulators
- 1 handle with 5 m spring to create a gate.



Sku.125705



CLASSIC RB85 Energizer

FENCING KIT FOR HARD-TO-CONTROL DOGS



The kit for hard-to-control dogs contains a more powerful energizer: the CLASSIC S170 (see pages 10/11 for technical characteristics). It will keep your dog safe and minimize the chances of it running away. It is easy to set up and contains all the elements required for an effective fence.

The kit includes:

- 1 S170 mains-powered fence energizer
- 1 roll green and white tape (12 mm x 200 m) + 5 connections
- 10 plastic fence posts (90 cm)
- 1 earth rod
- 1 "Electric fencing" warning sign
- 10 m lead-out cable
- 5 insulators
- 1 handle with 5 m spring to create a gate.



Sku. 125725 CLASSIC S170 Energizer



Nets

NON-ELECTRIFIED POULTRY NET



Non-electrified poultry net, height 1,12 m.

Sku. 125584225  3 700393 958007

25 m 

Sku. 125584250  3 700393 958014


50 m 

POULTRY NET, HEIGHT 1.12 M



Poultry net, height 1,12 m.

Sku. 125584  3 338020 043002

50 m 

FENCE POST FOR POULTRY NET



Post for poultry net. Height: 1,12 m.

Sku. 125585002  3 338020 065424


1,12 m 

COPPER FERRULE




Sku. 125602  3 338020 011353



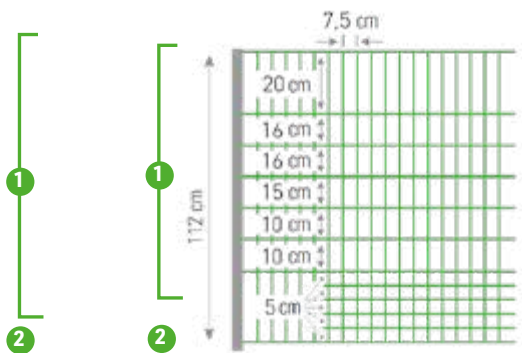

- 1 11 wires: Supporting wire: 3 x 5 monofilament, Ø 0,40 mm; conductor: 3 x 1 stainless steel, Ø 0,20 mm
- 2 1 wire: Supporting wire: 4 x 8 monofilament, Ø 0,40 mm

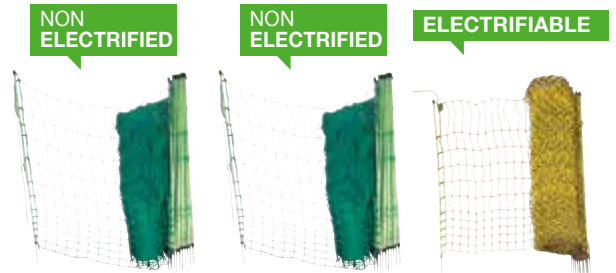

Technical characteristics	Sku. 125584225	Sku. 125584250	Sku. 125584
Length	25 m	50 m	50 m
Height	1,12 m	1,12 m	1,12 m
Electrified	No	No	Yes
Number of posts	9	15	15
Colour	Green	Green	Yellow
Quantity per pallet	66	45	40



FENCING BEAUMONT | Nets



CLASSIC SHEEP NET, HEIGHT 0.90 M


- Height: 0.90 m
- Length: 50 m
- Colour: Yellow
- Number of posts: 14
- **Electrified earth wire**

Electrified horizontal wires, non-electrified vertical wires. Each wire intersection is welded and is thus non-deformable and stronger.


Sku. 125582



50 m

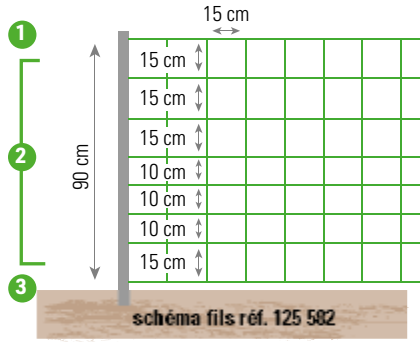

- 1 wire:** Supporting wire: 3 x 8 monofilament Ø 0,40 mm; conductor: 3 x 2 stainless steel Ø 0.20 mm.
- 6 wires:** porteur: 3 x 5 monofilament Ø 0,40 mm; conductor: 3 x 1 stainless steel Ø 0,20 mm.
- 3 1 wire:** porteur: 4 x 8 monofilament Ø 0,40 mm.



KOMBI SHEEP NET, HEIGHT 0.90 M

- Height: 0.90 m
- Length: 50 m
- Colour: orange and green
- Number of posts: 14

With struts. The struts keep the netting in place **when the ground is uneven.**

Sku. 125582001




50 m - Simple



Sku. 125586002



50 m - Double

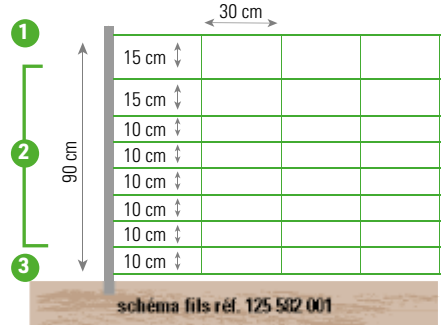

- 1 wire:** Supporting wire: 3 x 8 monofilament Ø 0,40 mm; conductor: 3 x 2 stainless steel Ø 0,20 mm.
- 6 wires:** Supporting wire: 3 x 5 monofilament Ø 0,40 mm; conductor: 3 x 1 stainless steel Ø 0,20 mm.
- 3 1 wire:** Supporting wire: 4 x 8 monofilament Ø 0,40 mm.



FENCE POST FOR SHEEP NET

Replacement fence post for your sheep nets, sold by unit.

Sku. 125585



0,90 m




BORDER NET REINFORCED SHEEP NET, HEIGHT 0.90 M

- Height: 0.90 m
 - Length: 50 m
 - Number of posts: 14
 - Colour: red
- Red with white intermediate posts. **20% more conductive than other sheep nets.** Nets created for heavy users of nets (migratory farmers, mountain farmers).

Sku. 125582003



50 m

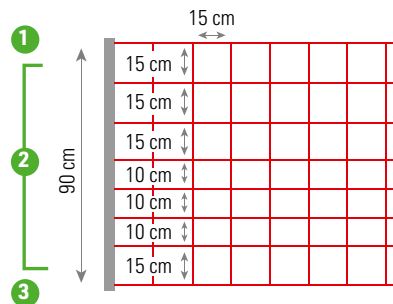

- 1 wire:** Supporting wire: 3 x 8 monofilament Ø 0,40 mm; conductor: 3 x 2 stainless steel Ø 0,25 mm.
- 6 wires:** Supporting wire: 3 x 5 monofilament Ø 0,40 mm; conductor: 3 x 1 stainless steel Ø 0,25 mm.
- 1 wire:** Supporting wire: 4 x 8 monofilament Ø 0,40 mm.

Technical characteristics	Sku. 125582	Sku. 125582001	Sku. 125586002	Sku. 125582003
Length	50 m	50 m	50 m	50 m
Height	0,90 m	0,90 m	0,90 m	0,90 m
Spikes	Single	Single	Double	Single
Struts	No	Yes	Yes	No
Colour	Yellow and White	Orange and green	Orange and green	Red and White
Quantity per pallet	77	66	66	77

GOAT NET, HEIGHT 1.06 M


- Height: 1.06 m
- Length: 50 m
- Colour: Yellow
- Number of posts: 14
- **Electrified earth wire**

Electrified horizontal wires, non-electrified vertical wires. Each wire intersection is welded and is thus non-deformable and stronger.

Sk. 125583



50 m

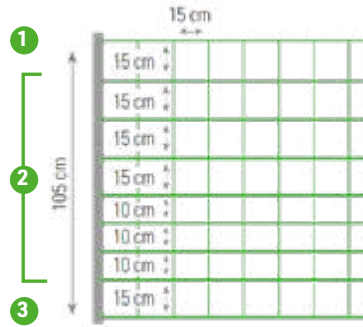

- 1 wire:** Supporting wire: 3 x 8 monofilament, Ø 0,40 mm; conductor: 3 x 2 stainless steel, Ø 0,20 mm.
- 6 wires:** Supporting wire: 3 x 5 monofilament, Ø 0,40 mm; conductor: 3 x 1 stainless steel, Ø 0,20 mm.
- 3 1 wire:** Supporting wire: 4 x 8 monofilament, Ø 0,40 mm.



KOMBI GOAT NET WITH STRUTS, HEIGHT 1.06 M

- Height: 1.06 m
- Length: 50 m
- Colour: orange and green
- Number of posts: 15

Sk. 125583001



50 m

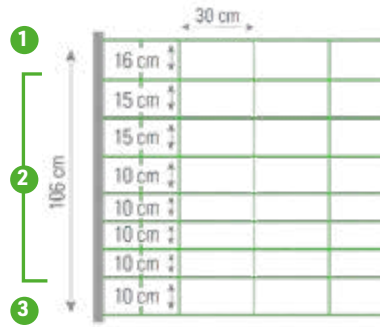

- 1 wire:** Supporting wire: 3 x 8 monofilament, Ø 0,40 mm; conductor: 3 x 2 stainless steel, Ø 0,20 mm.
- 6 wires:** Supporting wire: 3 x 5 monofilament, Ø 0,40 mm; conductor: 3 x 1 stainless steel, Ø 0,20 mm.
- 3 1 wire:** Supporting wire: 4 x 8 monofilament, Ø 0,40 mm.

FENCE POST FOR GOAT NET

Replacement fence post for your goat nets, sold by unit.

Sk. 125585001



1,06 m



FENCE POST FOR RABBIT NET

Replacement fence post for your rabbit nets, sold by unit.

Sk. 125585003



0,65 m





RABBIT NET, HEIGHT 0.65 M

- Height: 0,65 m
- Length: 50 m
- Colour: Yellow
- Number of posts: 15

Sk. 125584001



50 m

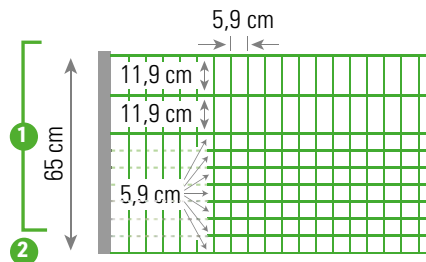

- 9 wires:** Supporting wire: 3 x 5 monofilament, Ø 0,40 mm; conductor: 3 x 1 stainless steel, Ø 0,20 mm.
- 1 wire:** Supporting wire: 4 x 8 monofilament, Ø 0,40 mm.

FENCING BEAUMONT | Practical guide

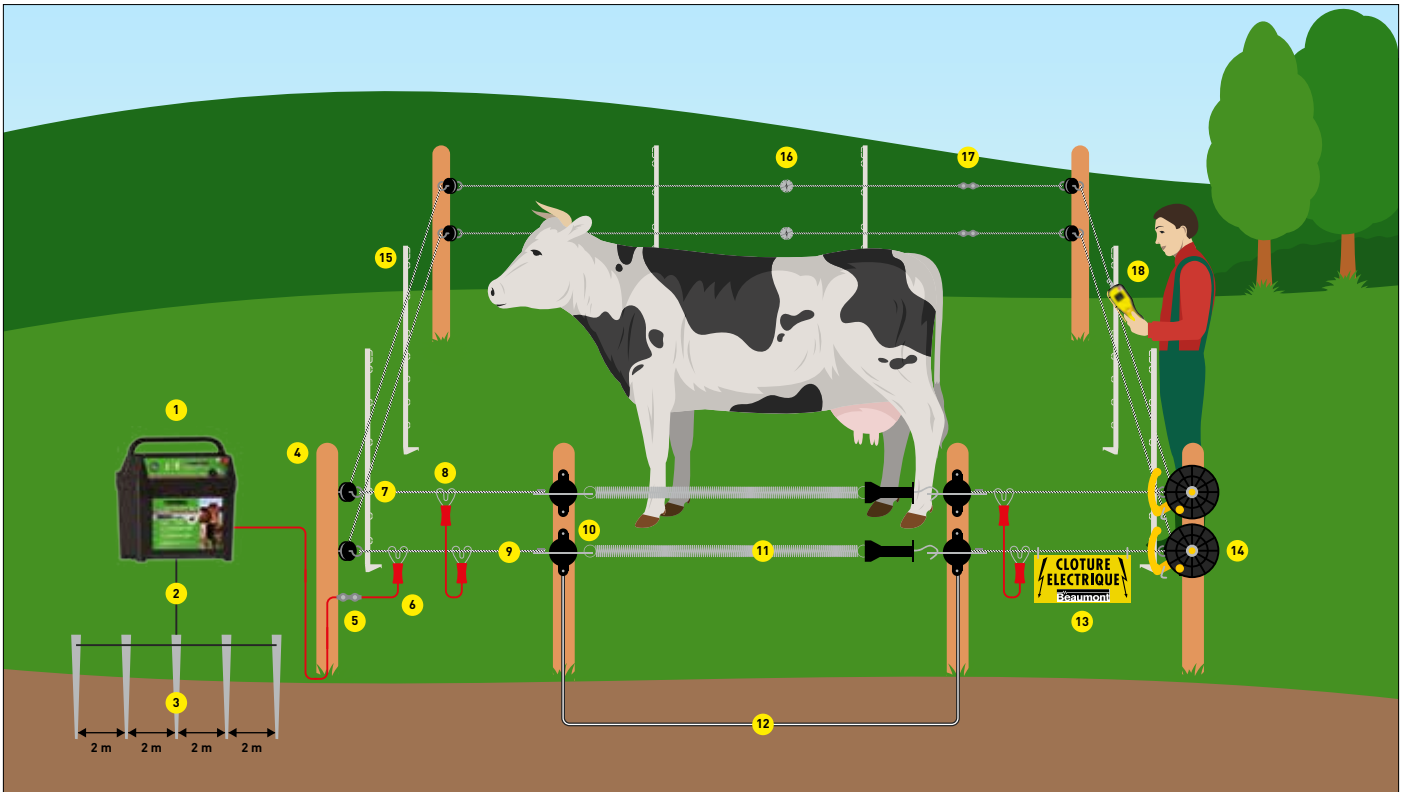


DIAGRAM OF MOBILE FENCING FOR COWS

- | | | |
|--------------------------|--------------------------------------|--------------------------|
| 1. Dual energizer | 7. Corner insulator for wire | 13. Warning sign |
| 2. Earthing wire | 8. Wire-to-wire connector | 14. Reel |
| 3. Earth rod | 9. Fence wire | 15. Plastic fence posts |
| 4. Wooden post | 10. Anchor insulator for wire | 16. Wire strainer |
| 5. Connector | 11. Gate kit with spring | 17. Connection for wire |
| 6. Fence connecting wire | 12. Direct-burial high-voltage cable | 18. Digital fence tester |

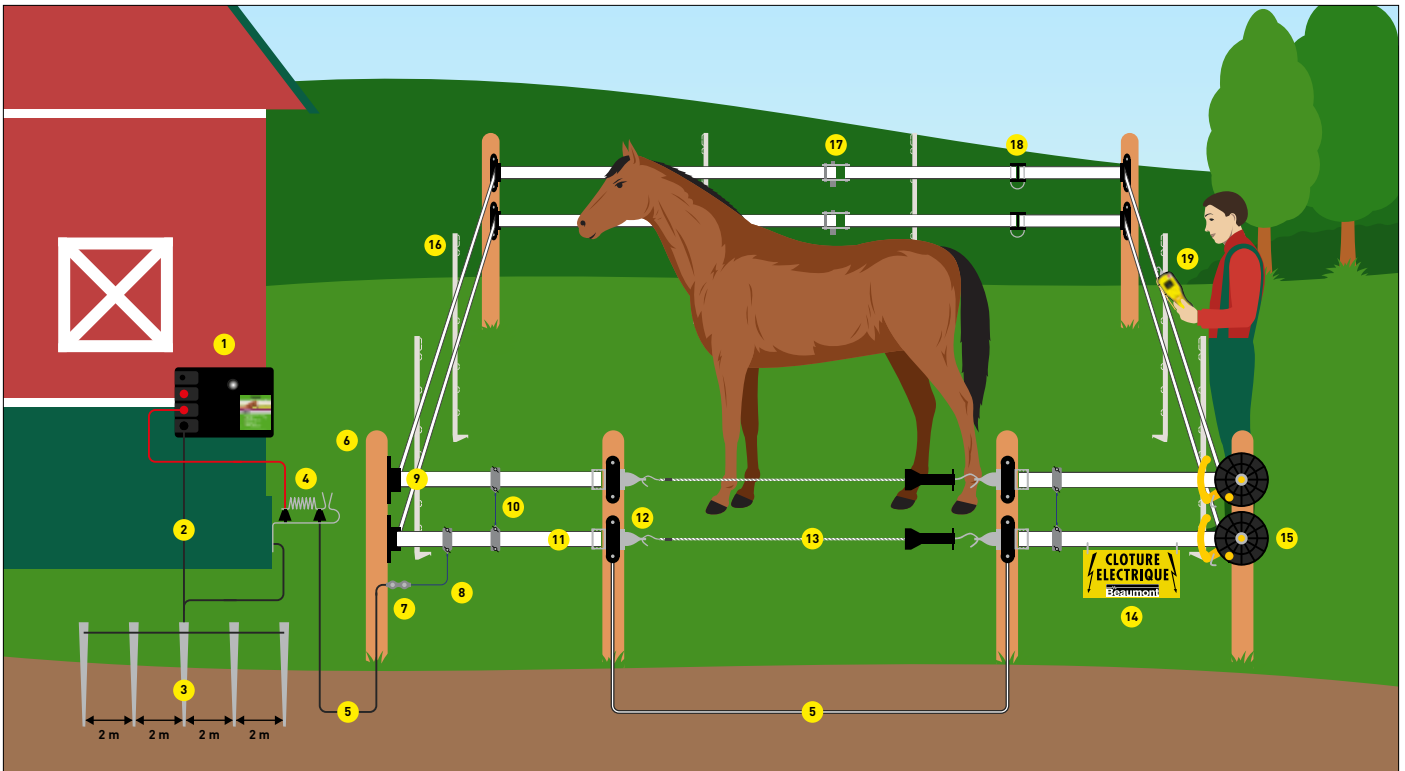


DIAGRAM OF MOBILE FENCING FOR HORSES

- | | | |
|-------------------------------------|--------------------------------|--------------------------|
| 1. Mains energizer | 8. Fence connecting wire | 15. Reel |
| 2. Earthing wire | 9. Corner insulator | 16. Plastic fence posts |
| 3. Earth rod | 10. Tape-to-tape connector | 17. Tape strainer |
| 4. Lightning conductor | 11. Fence tape | 18. Connection for tape |
| 5. Direct-burial high-voltage cable | 12. Anchor insulator | 19. Digital fence tester |
| 6. Wooden post | 13. Gate kit with elastic cord | |
| 7. Connector | 14. Warning sign | |

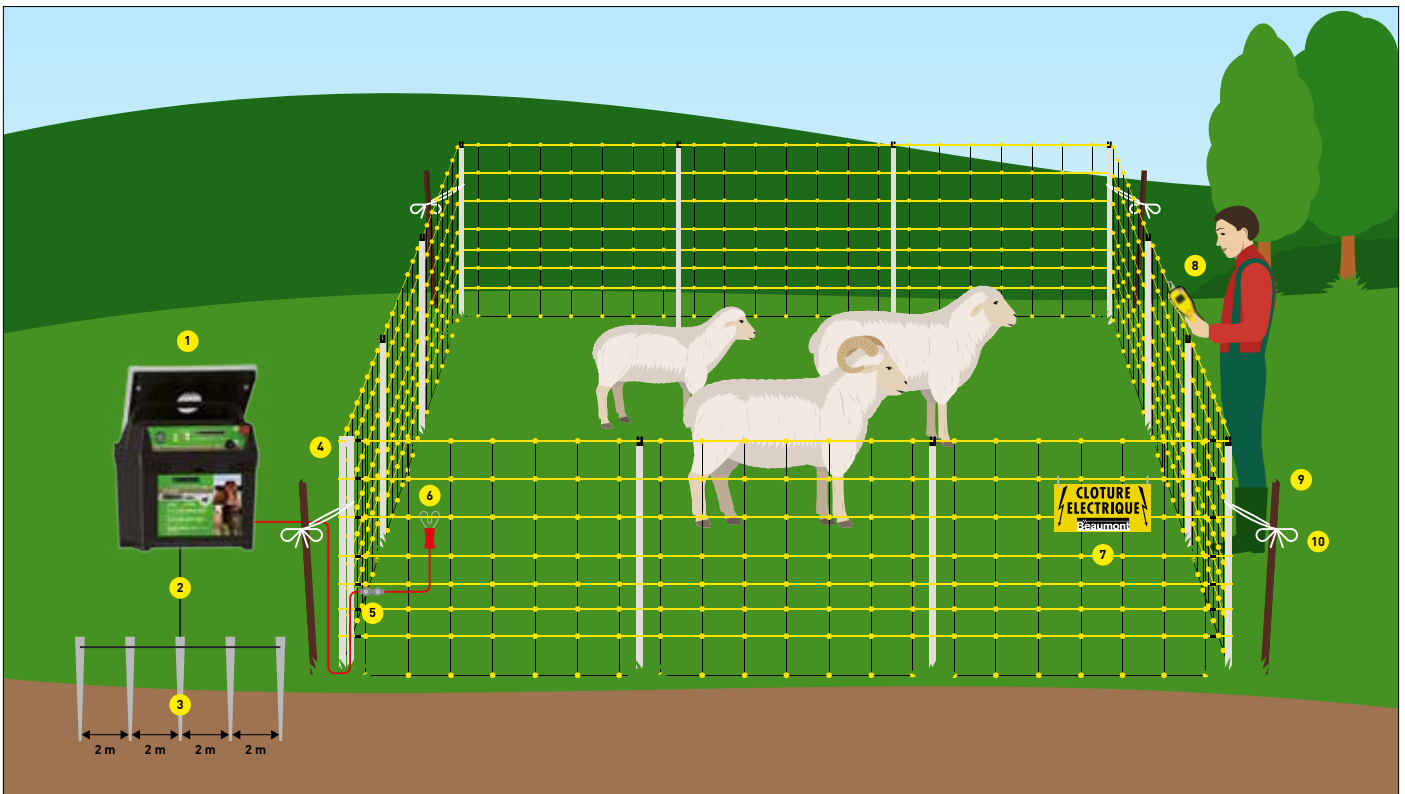


DIAGRAM OF MOBILE FENCING FOR SHEEP

- 1. Solar energizer
- 2. Earthing wire
- 3. Earth rod
- 4. Sheep net

- 5. Connector
- 6. Fence connecting wire
- 7. Warning sign
- 8. Digital fence tester

- 9. Corner post
- 10. Farmer rope


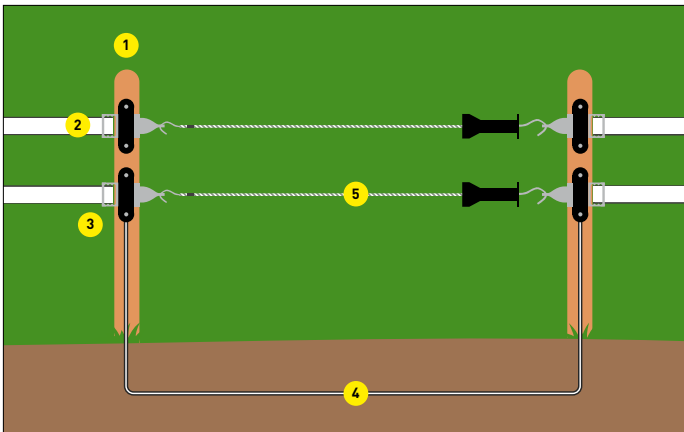


DIAGRAM OF GATE KIT

- 1. Wooden post
- 2. Fence tape
- 3. Anchor insulator
- 4. Direct-burial high-voltage cable

- 5. Gate kit with elastic cord

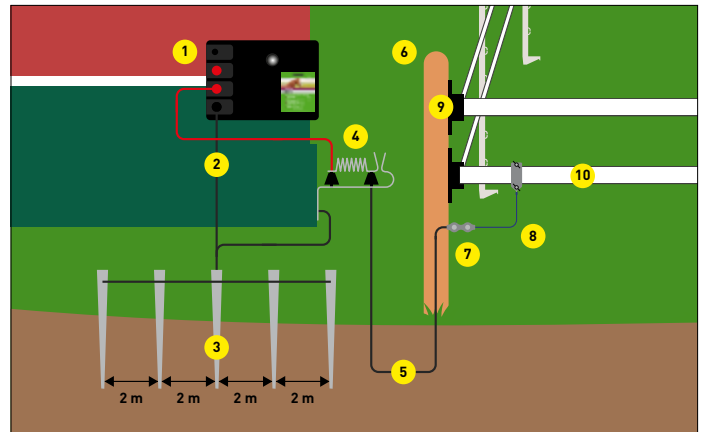

CONNECTION DIAGRAM FOR FENCE ENERGIZER

- 1. Mains energizer
- 2. Earthing wire
- 3. Earth rod
- 4. Lightning conductor
- 5. Direct-burial high-voltage cable

- 6. Wooden post
- 7. Connector
- 8. Fence connecting wire
- 9. Corner insulator
- 10. Fence tape



OUR ADVICE



TIP REGARDING THE BATTERY:

Take off the scotch tape to air the battery. Ideally, we recommend waiting a few minutes for the chemical reaction to take effect before activating the battery.

Place the battery in the energizer, making sure it is the right way round (red/red - black/black). Place some scotch tape back on the battery when storing it to extend its lifespan.

IN A FEW STEPS
ELEC
FENCING
CONDUCTORS
POSTES
DEVIS

"PLAN YOUR OWN MADE-TO-MEASURE ELECTRIC FENCING PROJECT!"



EASY



QUICK



EFFICIENT


MORE THAN
2000
COMBINATIONS!



OUR BRANDS:



DISCOVER OUR VIDEO!



www.ukal-elevage.com/en/fencecalculator

UKAL    



UKAL

THE LEGACY OF A PASSION

UKAL ELEVAGE

Parc économique de la Sauer
2 rue de l'Étang
CS 50244 Eschbach
67892 Niederbronn-les-Bains
France
Tél.: +33 3 88 07 40 15
ukatel@ukal.com
www.ukal.com

POLAND ROLOS

Ul. Henryka Sienkiewicza 2
Wyszków
PL 07-200
Polska
rolos@horizont.com.pl
Tel.: +48 29 742 33 39
www.horizont.com.pl

AFTER SALES SERVICES

sav@ukal.com
Tél.: 03 88 90 73 93

UKAL INTERNATIONAL

Tél.: +33 3 88 07 40 16
Fax: +33 3 88 07 40 14
export@ukal.com

SLOVENIA HORIZONT CLAIR D.O.O. TRGOVSKO PODJETJE D.O.O.

Zbilje 4 H
1215 SL - Medvode
Slovenien
Tel.: +386 (0) 1 3617 606
Fax: +386 (0) 1 3617 607
info@clair.si
www.agro-clair.si

GERMANY HORIZONT ANIMAL CARE

Homberger Weg 4-6
34497 Korbach
Germany
Tel.: +49 (0) 5631/565-100
animalcare@horizont.com
animalcare.horizont.com

UNITED KINGDOM HOTLINE ELECTRIC FENCING

2 Roundhead Road
Heathfield Industrial Estate
Newton Abbot
Devon TQ12 6UE
United Kingdom
Tel: +44 (0) 1626 33 11 88
Fax: +44 (0) 1626 33 18 10
sales@hotline-fencing.co.uk
hotline.horizont.com

UKAL CANADA INC.

7525 rue Pion
J2R 1R8
St Hyacinthe
Québec / Canada
Tél: (450) 796-1414
Fax: (450) 796-1415
Sans frais : 1 800 665 8389
info@ukal.ca



UKAL.com

